

EnviroMaxx Commercial LED Light Fixtures

EnviroLight-EM1000, EnviroLight-EM1600, EnviroLight-EM3000



Technical Specifications

Model	EnviroLight-EM1000	EnviroLight-EM1600	EnviroLight-EM3000
Voltage	12V DC	12V DC	12V DC
Power Draw	15W	22W	35W
Light Output	1000 Lm	1600 Lm	2500 Lm
Color Temperature	3150K	3150K	3150K
IP Grade	IP65	IP65	IP65
Beam Angle	120°	120°	120°
Dimensions (L x W x D)	6.00" x 3.94" x 2.00"	6.00" x 3.94" x 2.00"	9.07" x 6.08" x 2.23"
Efficiency	≥ 85%	≥ 85%	≥ 85%
Operating Temperature	-4 ~ 131 °F	-4 ~ 131 °F	-4 ~ 131 °F
Warranty	5 Years	5 Years	5 Years


Description

- Ultra-bright LED chip with low-voltage constant current driver.
- Static electricity-free coated surface for maximum protection
- Great heat dissipation, waterproof, dust-proof and cold climate proof
- Mounting bracket included for fast, hassle-free mounting
- Use for sign lighting, flood lighting and outside area lighting as needed

Photometrics

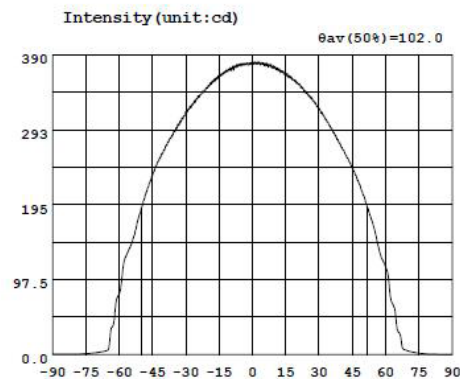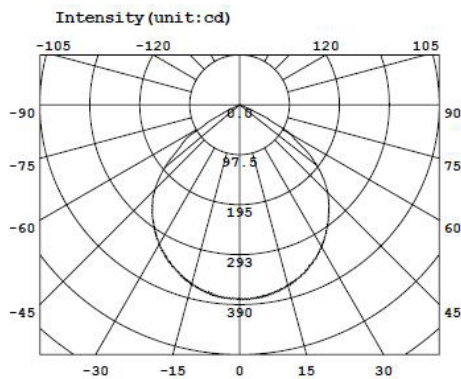

Technical Drawings

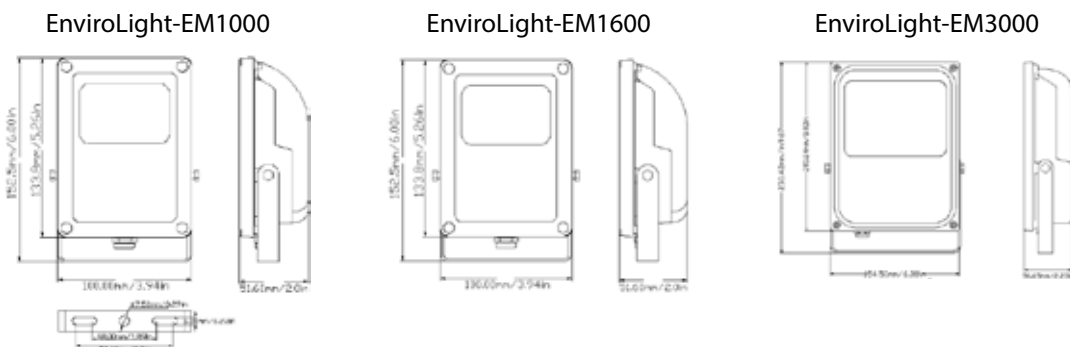

Certifications



Silicon Solar
2917 State Hwy 7
Bainbridge, NY 13733
P: 1.800.786.0329
www.SiliconSolar.com